


TIRE DIMENSION AND PRESSURE

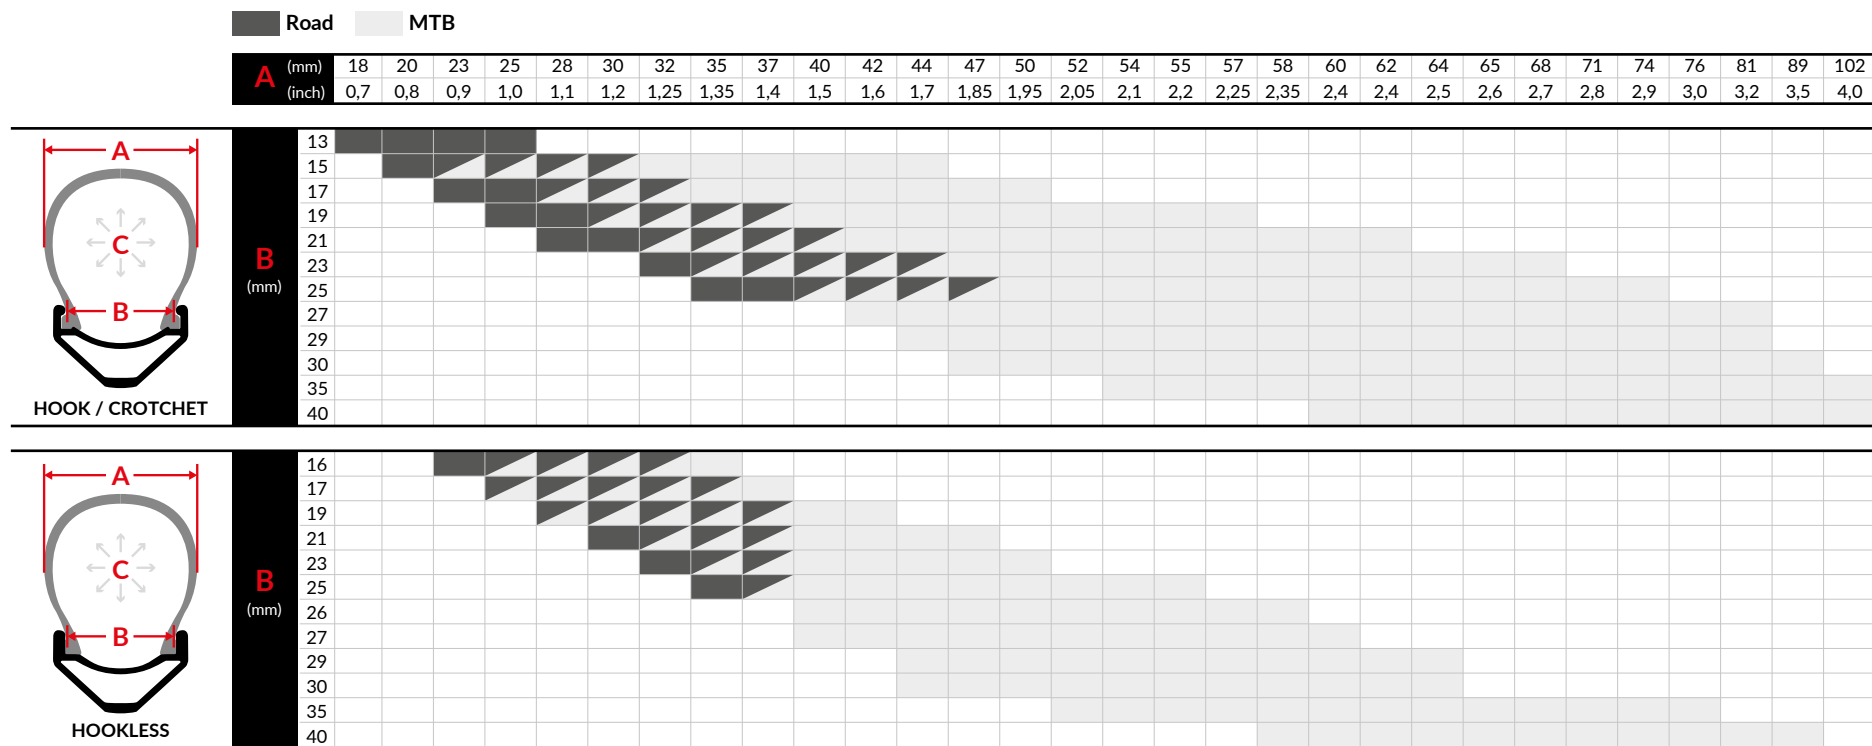

A TIRE WIDTH

Example: 25 - 622, Road 622 x 25; MTB 29 x 2,10

B RIM WIDTH

Example: 622 x 25C

C TIRE PRESSURE

The tyre pressure must stay within the values specified by the tyre manufactures. Proper pressure depends on the intended use (comfort, speed, grip, etc.) and on the bike-rider weight. Minimum inflation pressure in service is 4 bar for road tyres and 2,5 bar for MTB sizes. Note that the tubeless setup should have between 20% to 25% less pressure than the inner tube setup. In any case, the tyre deflection in use must not exceed 30% of the tyre section height.